

Project

Quantity

Notes


Type

Date

ALFIE

207768A 30" 3CCT LED Chandelier

FINISHES

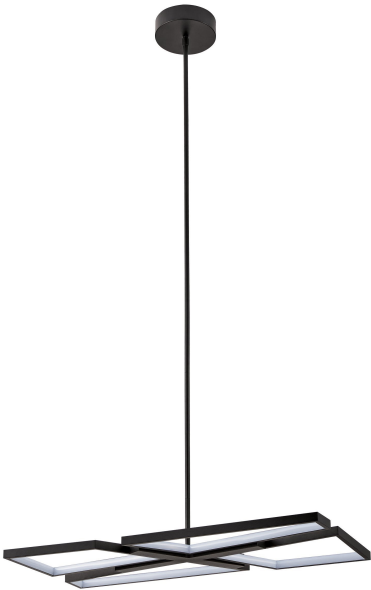

PRODUCT ATTRIBUTES

|                   |                   |
|-------------------|-------------------|
| Fixture Finish    | Textured Black    |
| Fixture Material  | Steel, Aluminum   |
| Diffuser Finish   | White             |
| Diffuser Material | PVC               |
| Switch Type       | 3CCT Slide Switch |
| Accessory Stems   | 208059A           |
| UPC Code          | 9008606380480     |
| Warranty          | 5 Years           |

DIMENSIONS

|                     |                                                   |
|---------------------|---------------------------------------------------|
| Fixture (W x D x H) | 30" (762 mm) x 15" (380 mm) x 1.25" (30 mm)       |
| Canopy (W x D x H)  | 6.25" (160 mm) x 6.25" (160 mm) x 2" (50 mm)      |
| Canopy Shape        | Round                                             |
| Min. Height         | 22" (560 mm)                                      |
| Max. Height         | 68.25" (1736 mm)                                  |
| Wire                | 144" (3660 mm)                                    |
| Rods                | 2 x 3" (76 mm), 2 x 6" (152 mm), 3 x 12" (305 mm) |
| Weight              | 8.71 LBS3.95 KG                                   |

LIGHT SOURCE

|                       |                      |
|-----------------------|----------------------|
| Light Source          | 33W LED (Integrated) |
| Color Temp. (K)       | 3000K, 4000K, 5000K  |
| Initial Lumens (lm)   | 5386                 |
| Delivered Lumens (lm) | 1910                 |
| CRI (Ra)              | >80                  |
| Lifetime Hours        | 25000 (L70)          |
| Dimmable              | Yes                  |

SPECIFICATIONS

|                    |                                                |                  |      |
|--------------------|------------------------------------------------|------------------|------|
| Input Voltage      | 120V, 60Hz                                     | Output Voltage   | 120V |
| System Type        | Hardwired                                      |                  |      |
| Certifications     | cETLus, FCC/ICES 005                           |                  |      |
| Location Rating    | Dry                                            |                  |      |
| Mounting Direction | Ceiling                                        |                  |      |
| Sloped Ceiling     | Yes                                            | Max. Slope Angle | 17°  |
| Light Direction    | Multiple                                       |                  |      |
| Adjustability      | Adjustable Height - Rods, Adjustable Lamp Head |                  |      |